

ZASTOSOWANIE / APPLICATION / ПРИМЕНЕНИЕ / POUŽITÍ



PARAMETRY / CHARACTERISTICS / ХАРАКТЕРИСТИКИ



PAKOWANIE / PACKING / УПАКОВКА / BALENÍ




SKŁAD ZESTAWU / SET INCLUDES / КОМПЛЕКТАЦИЯ / OBSAH BALENÍ



Zawias (P20/Soft Close)
Hinge (P20/Soft Close)
петля (P20/Soft Close)

PRODUKTY POWIĄZANE / RELATED PRODUCTS / СВЯЗАННЫХ С НИМИ ПРОДУКТОВ / VOLITELNĚ DOSTUPNÉ

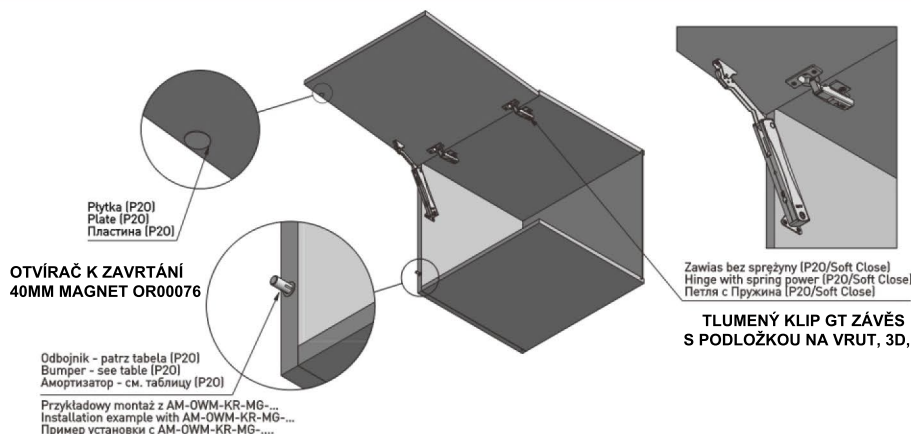

Odbojnik / Bumper /
Амортизатор

AM-OWM-KR-MG-...
AM-OWM-DL-MG-...
AM-OAM-KR-MG-...
AM-OAM-DL-MG-...
AM-PL-DL-MAG



Zawias / Hinge / Петля

ZP-COCA....

Zawias / Hinge / Петля

ZM-DCHC...
ZM-ECHC...
ZM-CNHC...
ZM-INHC...




PLANOWANIE / PLANNING / ПРОЕКТИРОВАНИЕ / PLÁNOVÁNÍ

Wymiary zabudowy
Cabinet planning information
Размер установки
ROZMĚRY PRO MONTÁŽ

Rozstaw otworów montażowych w korpusie i na froncie
Spacing of mounting holes in the body and on front
Расстояние между монтажными отверстиями в корпусе и на фасаде
UMÍSTĚNÍ OTVORŮ NA KORPUSU A VÝKLOPNÉM ČELE

NF – natożenie frontu
front overlap
наложение фасада

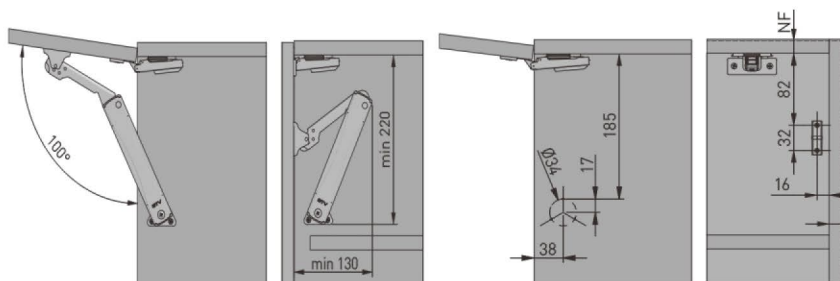

	Wymiary frontu Front dimensions размеры фасада		HMOTNOST ČELA Waga frontu Front weight вес фасада	Zalecana ilość podnośników (szt.) Recommended number of lifts (psc) Рекомендуемое количество лифтов (шт.)
	Wysokość Height Высота	Szerokość Width Ширина		
PD-MINILIFTNEW-LIGHT	300-400 mm	500-800 mm	2-3 kg	1
	300-400 mm	500-1000 mm	3,1-4 kg	2
PD-MINILIFTNEW-MEDIUM	300-450 mm	500-1000 mm	3,5-4,5 kg	1
	300-450 mm	500-1200 mm	5,5-7,5 kg	2
PD-MINILIFTNEW-STRONG	380-550 mm	500-1200 mm	5-6 kg	1
	380-550 mm	500-1200 mm	6,5-10 kg	2